


Glycol Chiller Extra 3/4 hp

SPECIFICATIONS




INTERNAL NUMBER		151.00.000.00-01
PART NUMBER		EG 3/4GP
MAXIMUM DISTANCE	ft	UP TO 450
CAPACITY	BTU/h, evap 20°F	5500
GLYCOL TANK CAPACITY	gal	18
COMPRESSOR POWER	HP	3/4
DEDICATED CIRCUIT	amp	20
PLUG TYPE (NEMA #)		5-20P
VOLTAGE / FREQUENCY	V / Hz	115 / 60
PUMP TYPE		VANE WITH 1/3 HP MOTOR
PUMP	GPH	100
NUMBER OF PRE-INSTALLED PUMPS		1
OPTIONAL ADDITIONAL PUMP	GPH	100
NUMBER OF ADDITIONAL PUMPS		1
REFRIGERANT		R134A
WIDTH	in	28
DEPTH	in	23
HEIGHT	in	30 / 36 (ON LEGS)
WEIGHT GROSS/NET	lb	164 / 154
POWER CORD LENGTH	ft	6
INLET/OUTLET BARB	in	3/8
OPERATING AMBIENT TEMPERATURE	°F	60-90
CLEARANCE AT LEAST		12" AROUND THE ENTIRE UNIT
GLYCOL MIXTURE, VOL%		40% GLYCOL AND 60% WATER


OVERALL DIMENSIONS

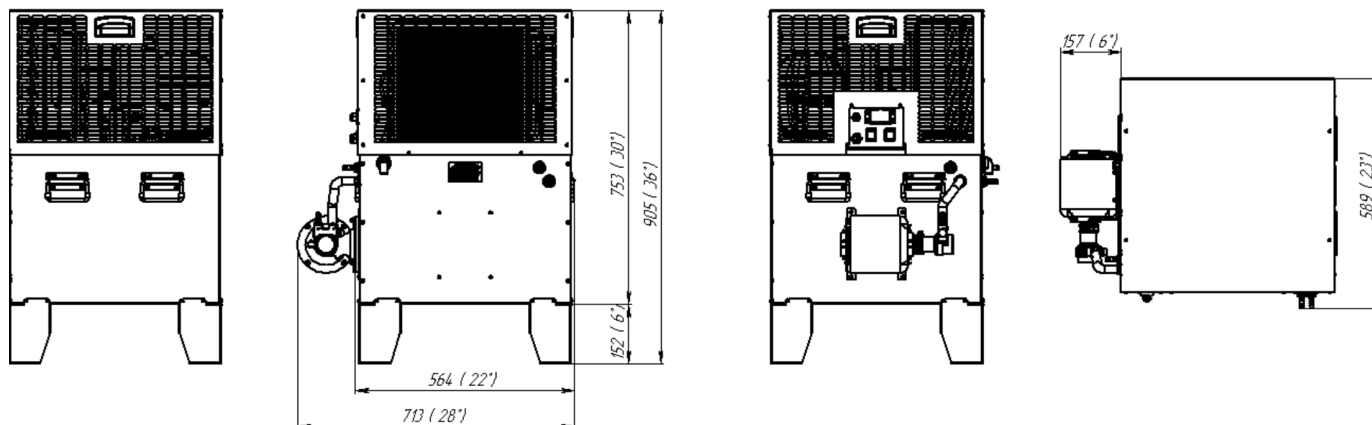

WIRING DIAGRAM

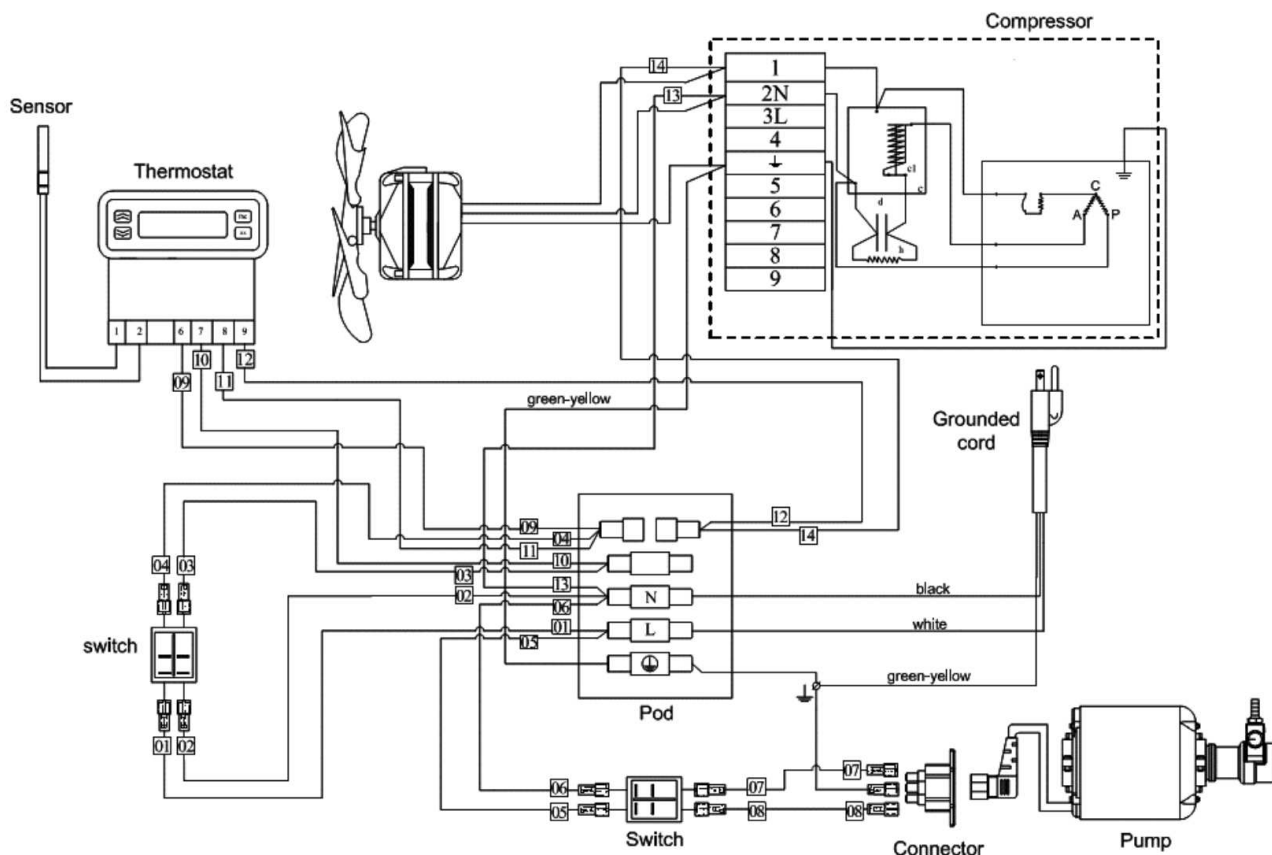

OVERALL DIMENSIONS

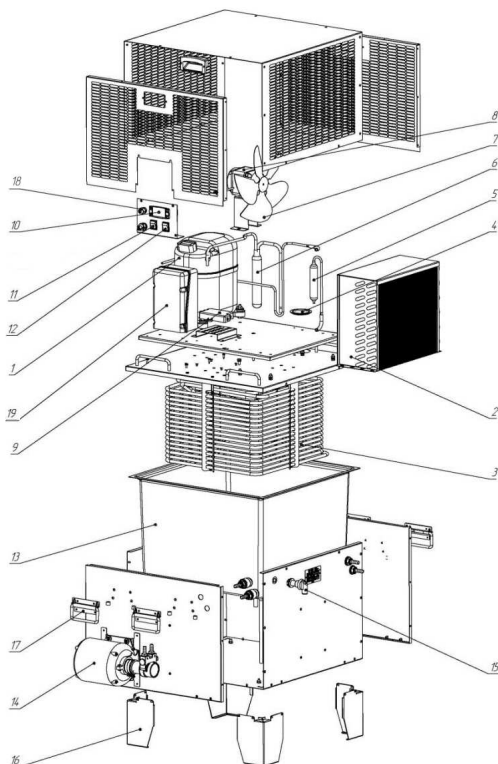

- 1 COMPRESSOR "TECUMSEH" CAJ4492Y (115/60)
- 2 AIR CONDENSER "KARYER" B-16804
- 3 EVAPORATOR
- 4 CAP
- 5 FILTER-DRIER "BVB" GR 30- 6,1x3,1
- 6 ACCUMULATOR 30X200; 8,1-10,1
- 7 IMPELLER Ø254 mm., $\alpha=28^\circ$
- 8 ELECTRIC MOTOR "ELCO" NU 25-45-2/2004 (115V 50/60Hz)
- 9 TERMINAL BLOCK "ITW ELETTRGIBI " PA104
- 10 THERMOSTAT "DIXELL" XR02CX-4N0F1 (115 V/ 60Hz)
- 11 POWER SWITCH "ARCOELECTRIC" C6053ALBR (RED)
- 12 POWER SWITCH "ARCOELECTRIC" C6053ALBG (GREEN)
- 13 GLYCOL BATH
GLYCOL PUMP «FLUID-O-TECH» PA 2501 («PROCON» 102A080F11BA),
COVER TO THE PUMP «FLUID-O-TECH», SET UNION JOINT «FLUID-O-TECH»
48 YZ AND MOTOR "MARATHON" 5KH32FN5586MX (115V/60Hz)
- 15 OVERFLOW
- 16 LEG
- 17 HANDLE
- 18 CONNECTOR R302SN 250V/10A
- 19 ELECTRIC SHOE "JUNIOR"