


Glycol Chiller **Kalinka-ICE** (R290)



SPECIFICATIONS



INTERNAL NUMBER		112.00.000.00-11
PART NUMBER		KG-1/6VP
MAXIMUM DISTANCE	ft	UP TO 25
CAPACITY	BTU/h, evap 20°F	1150
GLYCOL TANK CAPACITY	gal	2
COMPRESSOR POWER	HP	1/6
DEDICATED CIRCUIT	amp	15
PLUG TYPE (NEMA #)		5-15P
VOLTAGE / FREQUENCY	V / Hz	115 / 60
PUMP TYPE		VERTICAL
PUMP	GPH	4,5
NUMBER OF PRE-INSTALLED PUMPS		1
NUMBER OF ADDITIONAL PUMPS		N/A
REFRIGERANT		R290
WIDTH	in	17.1
DEPTH	in	18
HEIGHT	in	12.9
WEIGHT GROSS/NET	lb	45.4 / 52.1
POWER CORD LENGTH	ft	6
INLET/OUTLET BARB	in	3/8
OPERATING AMBIENT TEMPERATURE	°F	60-90
CLEARANCE AT LEAST		12" AROUND THE ENTIRE UNIT
GLYCOL MIXTURE, VOL%		40% GLYCOL AND 60% WATER

OVERALL DIMENSIONS

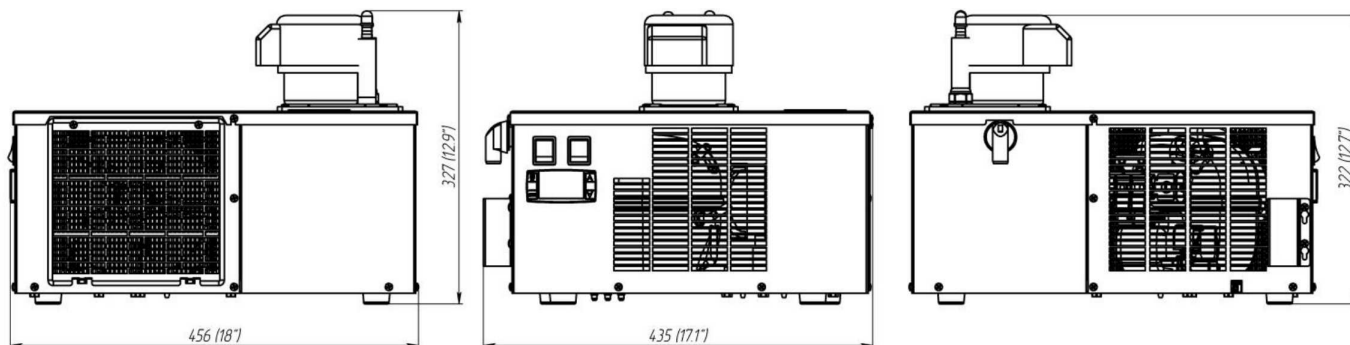

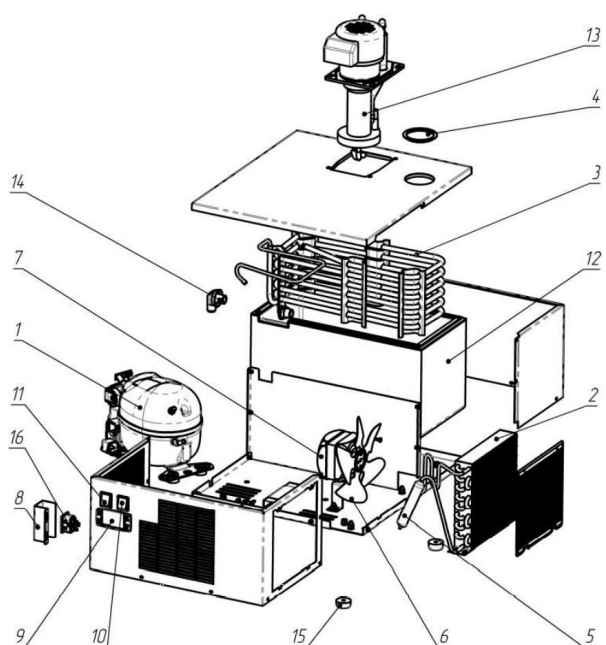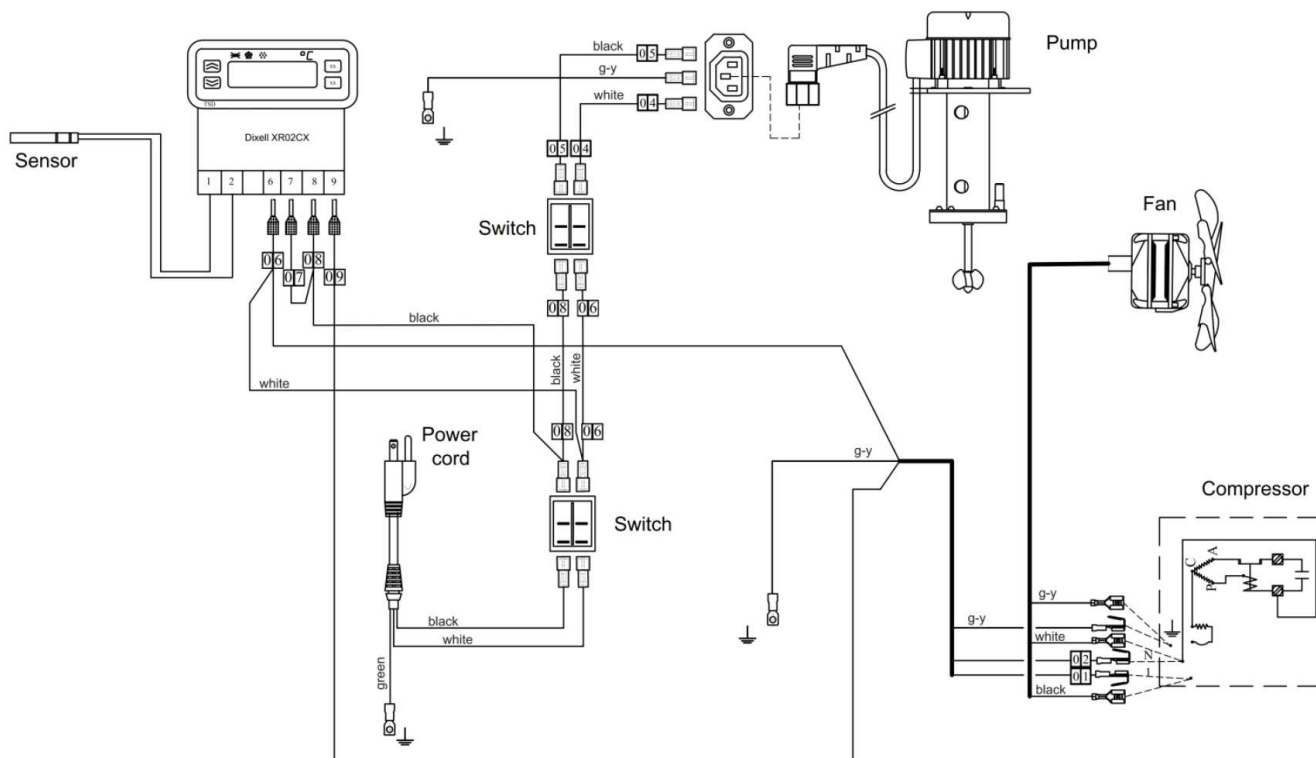

- | | |
|----|---|
| 1 | COMPRESSOR "EMBRACO" EMI 50UER (115-127V/60Hz)
OR "CUBIGEL" NBC30NR (115V, 60Hz) |
| 2 | AIR CONDENSER "KARYER" STFT 12118 |
| 3 | EVAPORATOR |
| 4 | CAP |
| 5 | FILTER-DRIER "DE.NA" GR15 6.1/2.1 |
| 6 | IMPELLER Ø172 mm., $\alpha=28^\circ$ |
| 7 | ELECTRIC MOTOR "EBM" M4Q045-BD-03-04 (115V, 60Hz)
OR "ELCO" NU 4-13-2/236 115 V, 60/50Hz |
| 8 | PROTECTIVE CASING |
| 9 | THERMOSTAT "DIXELL" XR02CX-4N0F1 (115 V/ 60Hz) |
| 10 | POWER SWITCH "ARCOLECTRIC" C6053ALBG (GREEN) |
| 11 | POWER SWITCH "ARCOLECTRIC" C6053ALBR (RED) |
| 12 | GLYCOL BATH |
| 13 | GLYCOL PUMP "FLOJET" SPC 17/4, (115V/60Hz) |
| 14 | OVERFLOW |
| 15 | FOOT |
| 16 | CONNECTOR R302SN 250V 10A |