



- **Stainless steel top, exterior and interior walls, and floor.**
- **Refrigeration system** keeps drinks at a safe temperature between 33F and 41F (0.5C to 5C)
- **Electronic control system** makes it easy to adjust the temperature set point and defrost frequency.
- **Heavy duty casters with brakes can be included with the fridge** (optional).
- **Shelves:** Adjustable heavy-duty PVC coated shelves.
- **Self-closing sliding doors with double-pane glass for enhanced insulation.**
- **Removable installation board** makes it easy to access the condenser coil for cleaning and service.
- **Refrigerant: HYDRO-CARBON R290.**

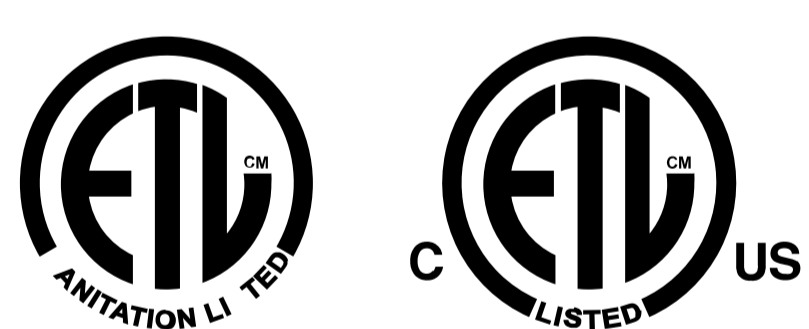

CBB-69

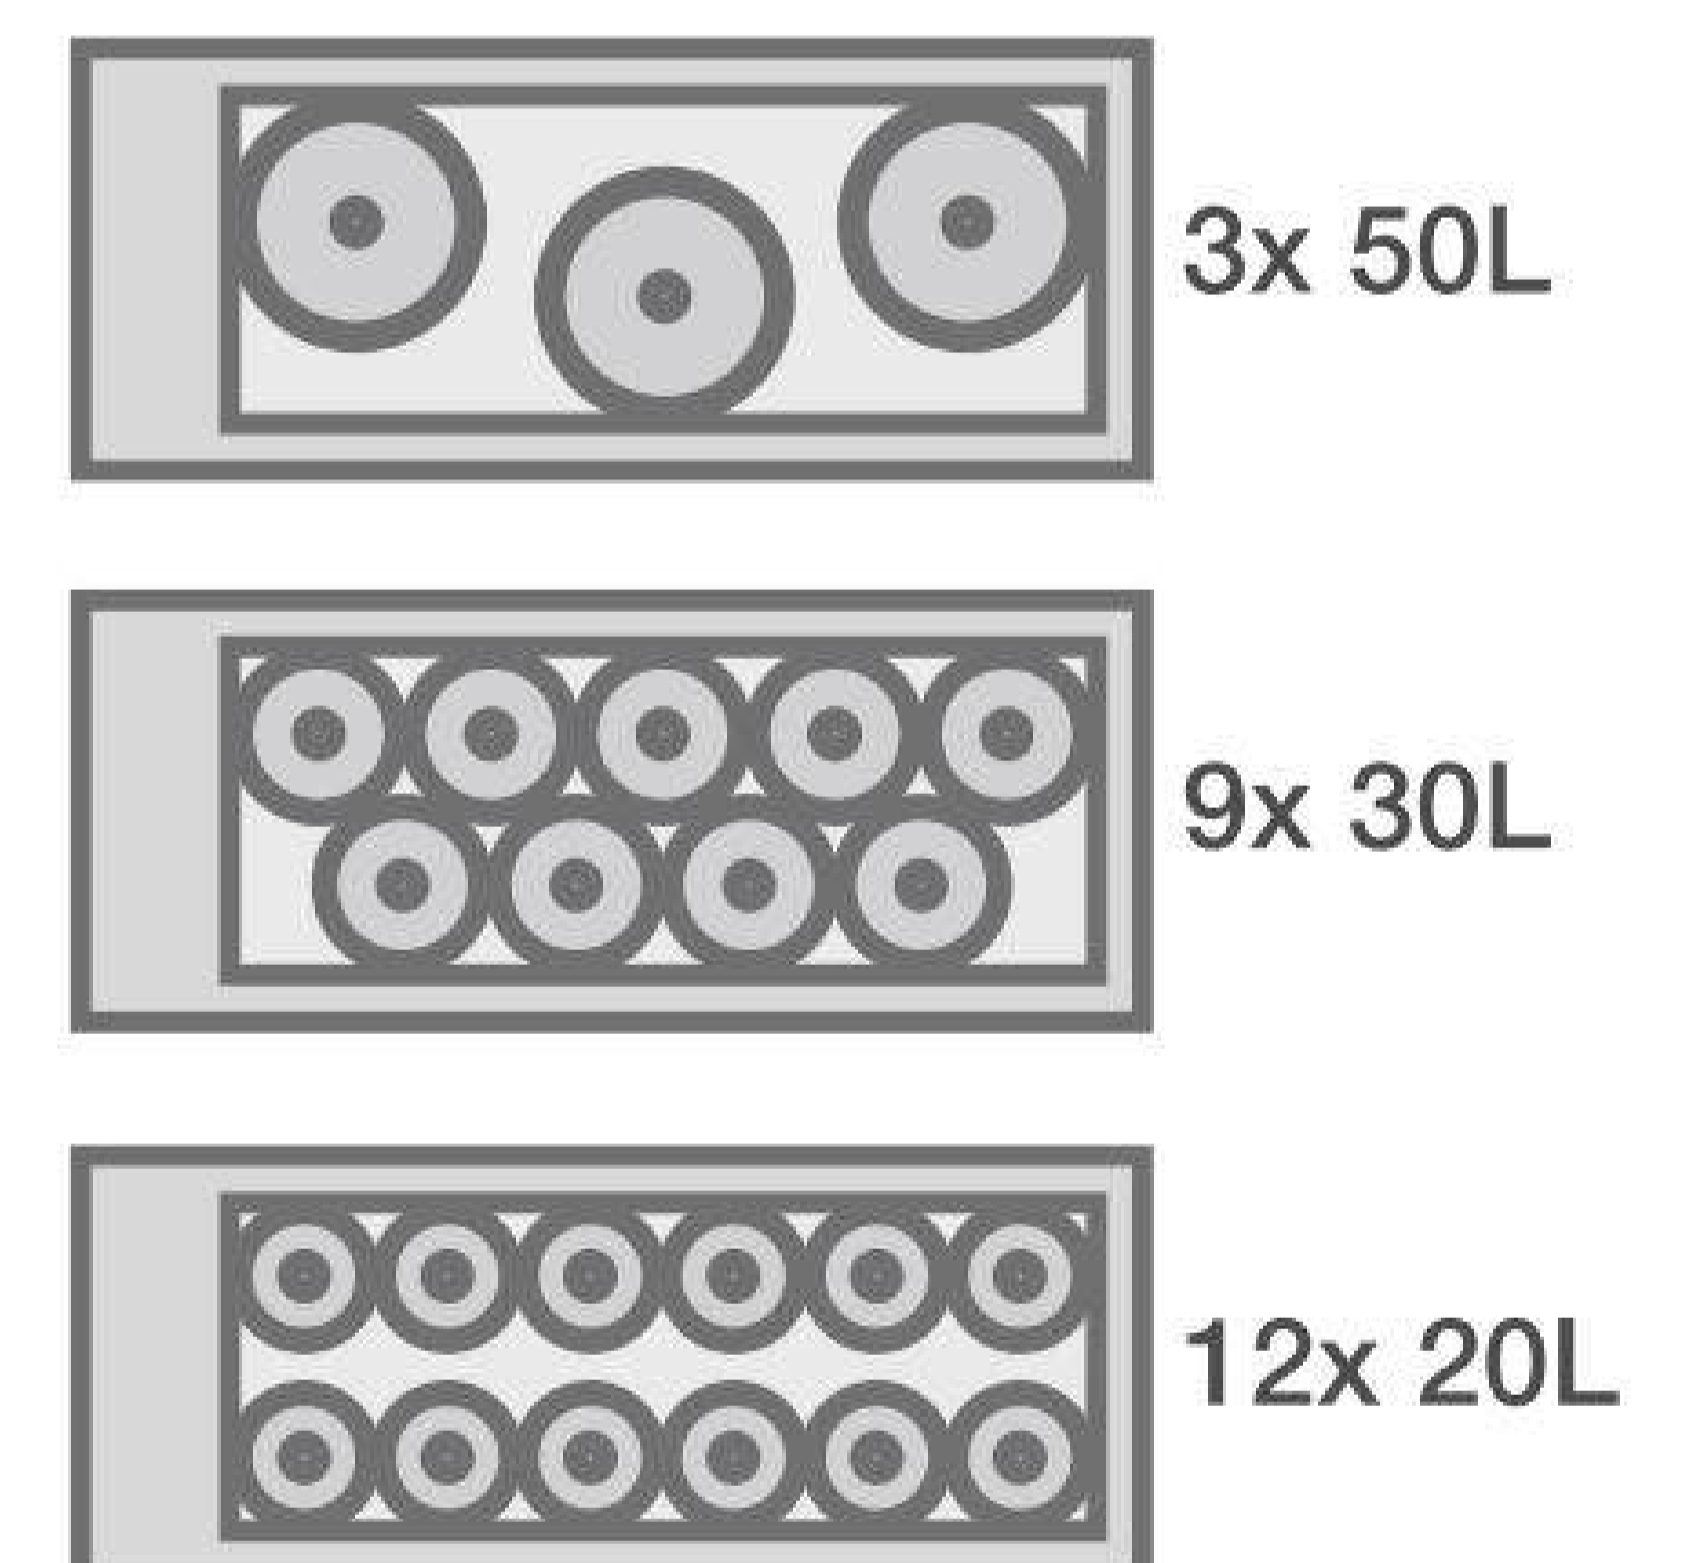

MODEL	DOORS	SHELVES	CAPACITY (12 oz. cans)	AMPS	HP	VOLTS	DIMENSIONS - WxDxH inches			PLUG TYPE
							Width	Depth	Height*	
CBB-69	2	4	546	3.5	1/5	115/60/1	69 1/8"	28 3/4"	35 5/8"	Nema 5-15P

*Specifications are subject to change without prior notice.

