


- **Stainless steel top, exterior and interior walls, and floor.**
- **Refrigeration system** keeps drinks at a safe temperature between 33F and 41F (0.5C to 5C)
- **Electronic control system** makes it easy to adjust the temperature set point and defrost frequency.
- **Heavy duty casters with brakes can be included with the fridge** (optional).
- **Shelves:** Adjustable heavy-duty PVC coated shelves.
- **Self-closing sliding doors with double-pane glass for enhanced insulation.**
- **Removable installation board** makes it easy to access the condenser coil for cleaning and service.
- **Refrigerant: HYDRO-CARBON R290.**

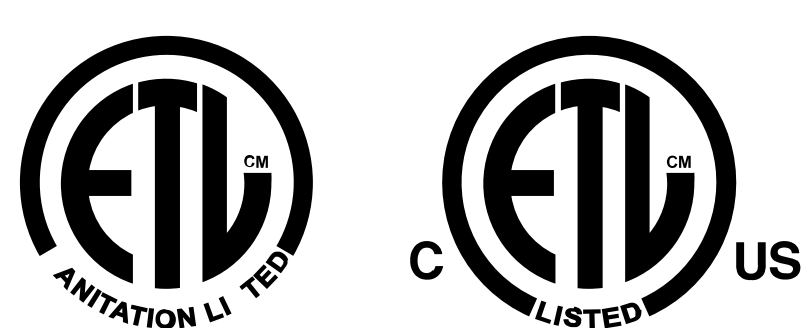

MODEL	DOORS	SHELVES	CAPACITY (cu.ft./ liters)	AMPS	HP	VOLTS	DIMENSIONS - WxDxH inches/ mm			PLUG TYPE
							Width	Depth	Height*	
CBB-72GSD-SS	3	6	18.6 525	3.5	3/7	115/60/1	72 3/4 1848	24 7/16 620	35 5/8 905	MEMA 5-15P

*Specifications are subject to change without prior notice.