

## GLASS DOOR MERCHANDISER REFRIGERATION

UBC Part# IS-EF24-300

#C1-24GDVC

### FEATURES


#### Features:

- Bottom mount compressor units
- Environmentally friendly R290 refrigerant
- Led lighting interior display system
- Dixell digital temperature control system
- Heavy duty Embraco compressor
- Self-closing and stay open door
- Efficient refrigeration system
- Recessed door handle
- Standard safety door lock
- Magnetic door gaskets
- Pre-installed casters
- Pre-installed shelves

#### Warranty:

- Two year parts and labour; Five years on compressor



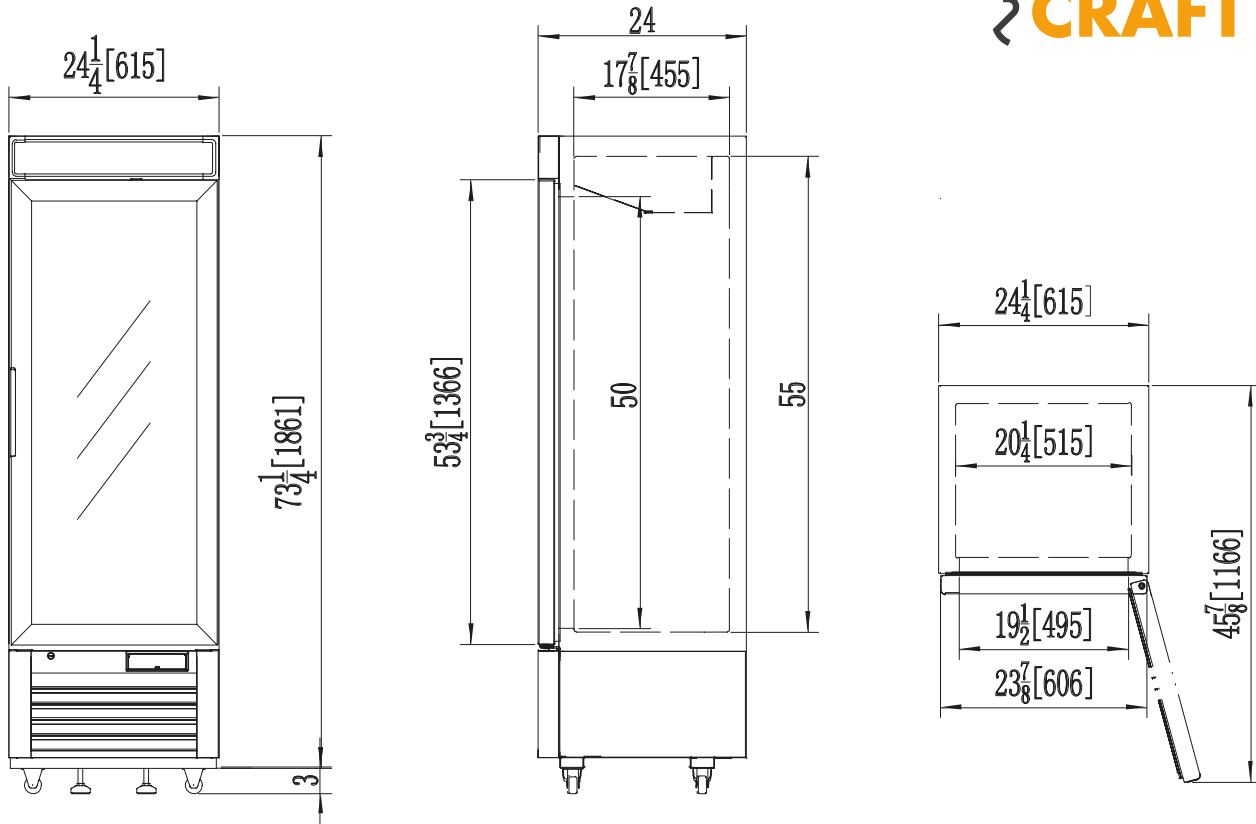

| Model     | Refrigerant | Doors | Shelves | Dimension<br>(mm)<br>(inch) |      |      | HP  | Voltage | Amps | Capacity<br>(L)<br>(Cu Ft.) | Net<br>Weight<br>(KG)<br>(LBS) | Temperature<br>Range |
|-----------|-------------|-------|---------|-----------------------------|------|------|-----|---------|------|-----------------------------|--------------------------------|----------------------|
|           |             |       |         | L                           | D    | H    |     |         |      |                             |                                |                      |
| C1-24GDVC | R290        | 1     | 4       | 615                         | 610  | 1935 | 1/6 | 115/60  | 2.1  | 314                         | 103                            | 1 ~ 8°C              |
|           |             |       |         | 24.2                        | 24.0 | 76.2 |     |         |      | 11.1                        | 227                            | 33 ~ 45°F            |

Equipped with one NEMA 5-15P plug 

## SHIPPING INFORMATION

| Crate Dimensions<br>(mm)<br>(inch) |      |      | Net Weight<br>(KG)<br>(LBS) | Gross Weight<br>(KG)<br>(LBS) |
|------------------------------------|------|------|-----------------------------|-------------------------------|
| L                                  | D    | H    |                             |                               |
| 668                                | 663  | 2083 | 103                         | 114                           |
| 26.3                               | 26.1 | 82   | 277                         | 251                           |

Specifications subject to change without notice.