

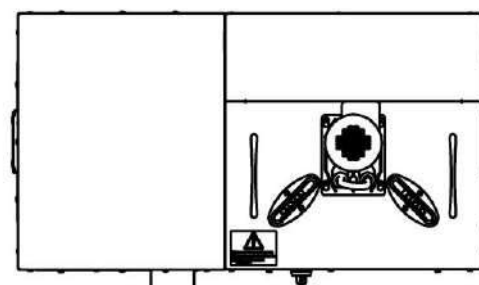


SPECIFICATIONS

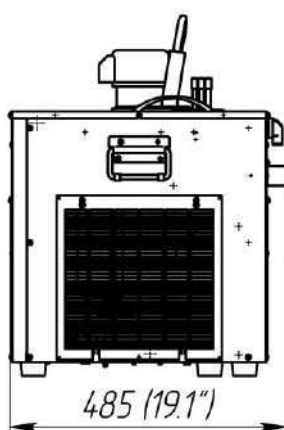


Internal number	007.00.000.00-XX
Part number	FC160
Compressor power, hp	1/2
Capacity, BTU/h, evap 20 °F	3100
Ice bank, BTU/h	7500
Dedicated circuit, amp	15
Plug type (NEMA #)	5-15P 
Voltage, V / frequency, Hz	115 / 60
Operating amperage, A	10
Refrigerant	R290
Outlet temperature, °F	32÷46
Operating ambient temperature, °F	60-90
Product lines (SS AISI 304)	6
OD product lines, in	5/16
Coil length, ft	63
	63
	62
	57
	53
	49
Width, in	32.8
Depth, in	19.1
Height, in	22.5
Weight gross/net, lb	152/122
Power cord length, ft	6


OVERALL DIMENSIONS

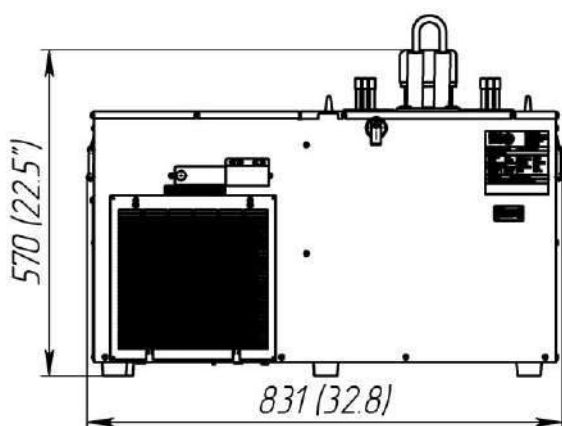

WIRING DIAGRAM

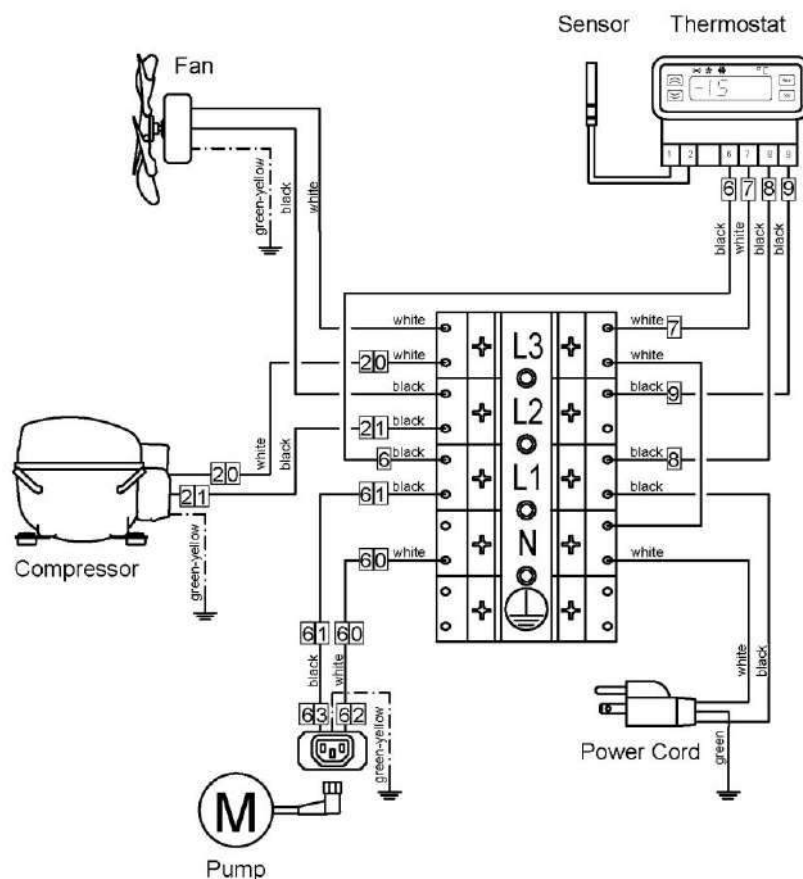

PARTS

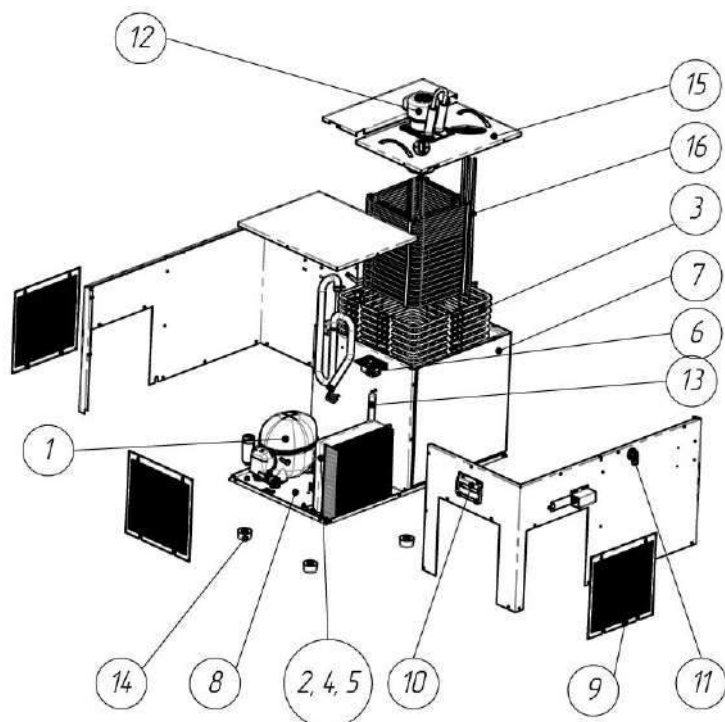

1	Compressor "Cubigel" NLY90RRa (115-127V/60Hz) or "Secop" NLE8.8CN (115-127V/60Hz)
2	Condenser "KARYER" UKSCOND03R09T
3	Evaporator
4	Impeller Ø230 mm., $\alpha=28^\circ$
5	Electric motor "ELCO" NU 9-20-2/094 (115V/50-60Hz) UL "Wgmotors" YZF10-20-26 (10W)(110-120V/60Hz) or "EBM" M4Q045-CA-27-04 (115V/60Hz)
6	Thermostat "DIXELL" XR02CX-4N0F1 (115 V/ 60Hz)
7	Bath
8	Base
9	Grid
10	Handle
11	Overflow
12	Glycol pump «TOTTON» SPC 42 (115V/60Hz)
13	Filter-drier "DE-NA" GR-15 d6.1xd6.1xd2.5
14	Foot
15	Lid
16	Product coils