



#### Features:


- Single or double glass door display fridge with ventilator cooling system
- LED interior lights
- Adjustable/removable plastic coated wire shelves
- Shelves can be set-up to hold standard full size hotel pans
- Bottom-mounted cooling unit is easy to remove and clean
- Outstanding temperature preservation reduces energy consumption via foamed-in polyurethane cell insulation


- Auto evaporation of defrosting water
- Round corner design for inner bottom shelf to facilitate easy cleaning
- Cold air circulation via fan for temperature balance
- Refrigeration unit holds 33°F to 45°F (0°C to 8°C) for optimum food preservation

#### Warranty:

- Two year parts and labour; Five years on compressor.



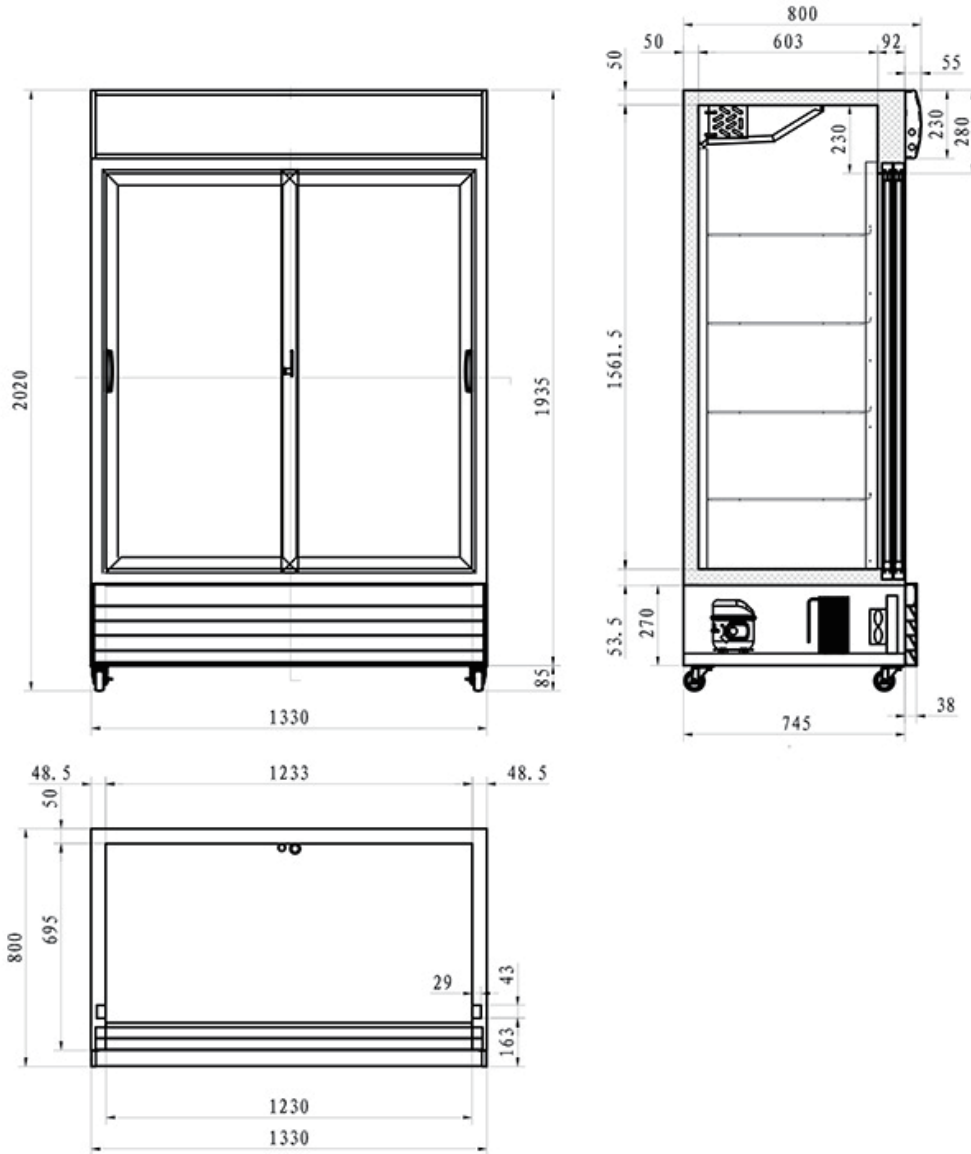

| Model      | Doors | Shelves | Dimension<br>(mm)<br>(inch) |      |      | HP  | Voltage | Amps | Capacity<br>(L)<br>(Cu Ft.) | Net Weight<br>(KG)<br>(LBS) | Temperature<br>Range | NEMA Config.  |
|------------|-------|---------|-----------------------------|------|------|-----|---------|------|-----------------------------|-----------------------------|----------------------|---|
|            |       |         | L                           | D    | H    |     |         |      |                             |                             |                      |   |
| C2S-52.4GD | 2     | 8       | 1330                        | 800  | 2020 | 1/2 | 115/60  | 9.5  | 1400                        | 178                         | 0 ~ 8°C              | 5-15P  |
|            |       |         | 52.4                        | 31.5 | 79.5 |     |         |      | 50                          | 392                         | 33 ~ 45°F            |   |

Specifications subject to change without notice.