


- Durable stainless steel top, interior walls, floor and ceiling.
- Exterior construction is attractive corrosion resistant vinyl on steel in black finish.
- Refrigeration system keeps the drinks at safe temperatures between 33°F and 41°F (0.5°C to 5°C).
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Pre-installed leveling feet. Heavy-duty casters with brakes included with each fridge.
- Self-Closing doors with locks.
- Removable installation board makes it easy to access condenser coil for cleaning and service.
- Refrigerant: HYDRO-CARBON R290.




## Beer Towers Included:

- 2 x 3" diameter 2-tap column towers, with 304SS shanks and faucets

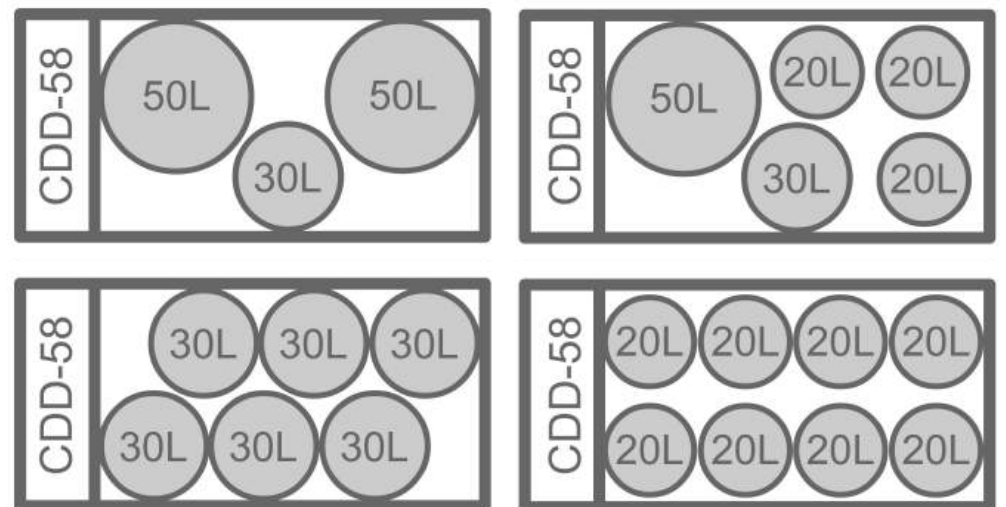

| MODEL  | DOORS | SHELVES | CAPACITY<br>(cu.ft./barrels) | AMPS | HP  | VOLTS    | DIMENSIONS - WxDxH inches/mm |               |               | PLUG TYPE  |
|--------|-------|---------|------------------------------|------|-----|----------|------------------------------|---------------|---------------|------------|
|        |       |         |                              |      |     |          | Width                        | Depth         | Height*       |            |
| CDD-58 | 2     | 4       | 19<br>2*1/2                  | 2.88 | 1/5 | 115/60/1 | 58 7/8<br>1495               | 27 3/4<br>705 | 35 5/8<br>905 | NEMA 5-15P |

\*Specifications are subject to change without prior notice.

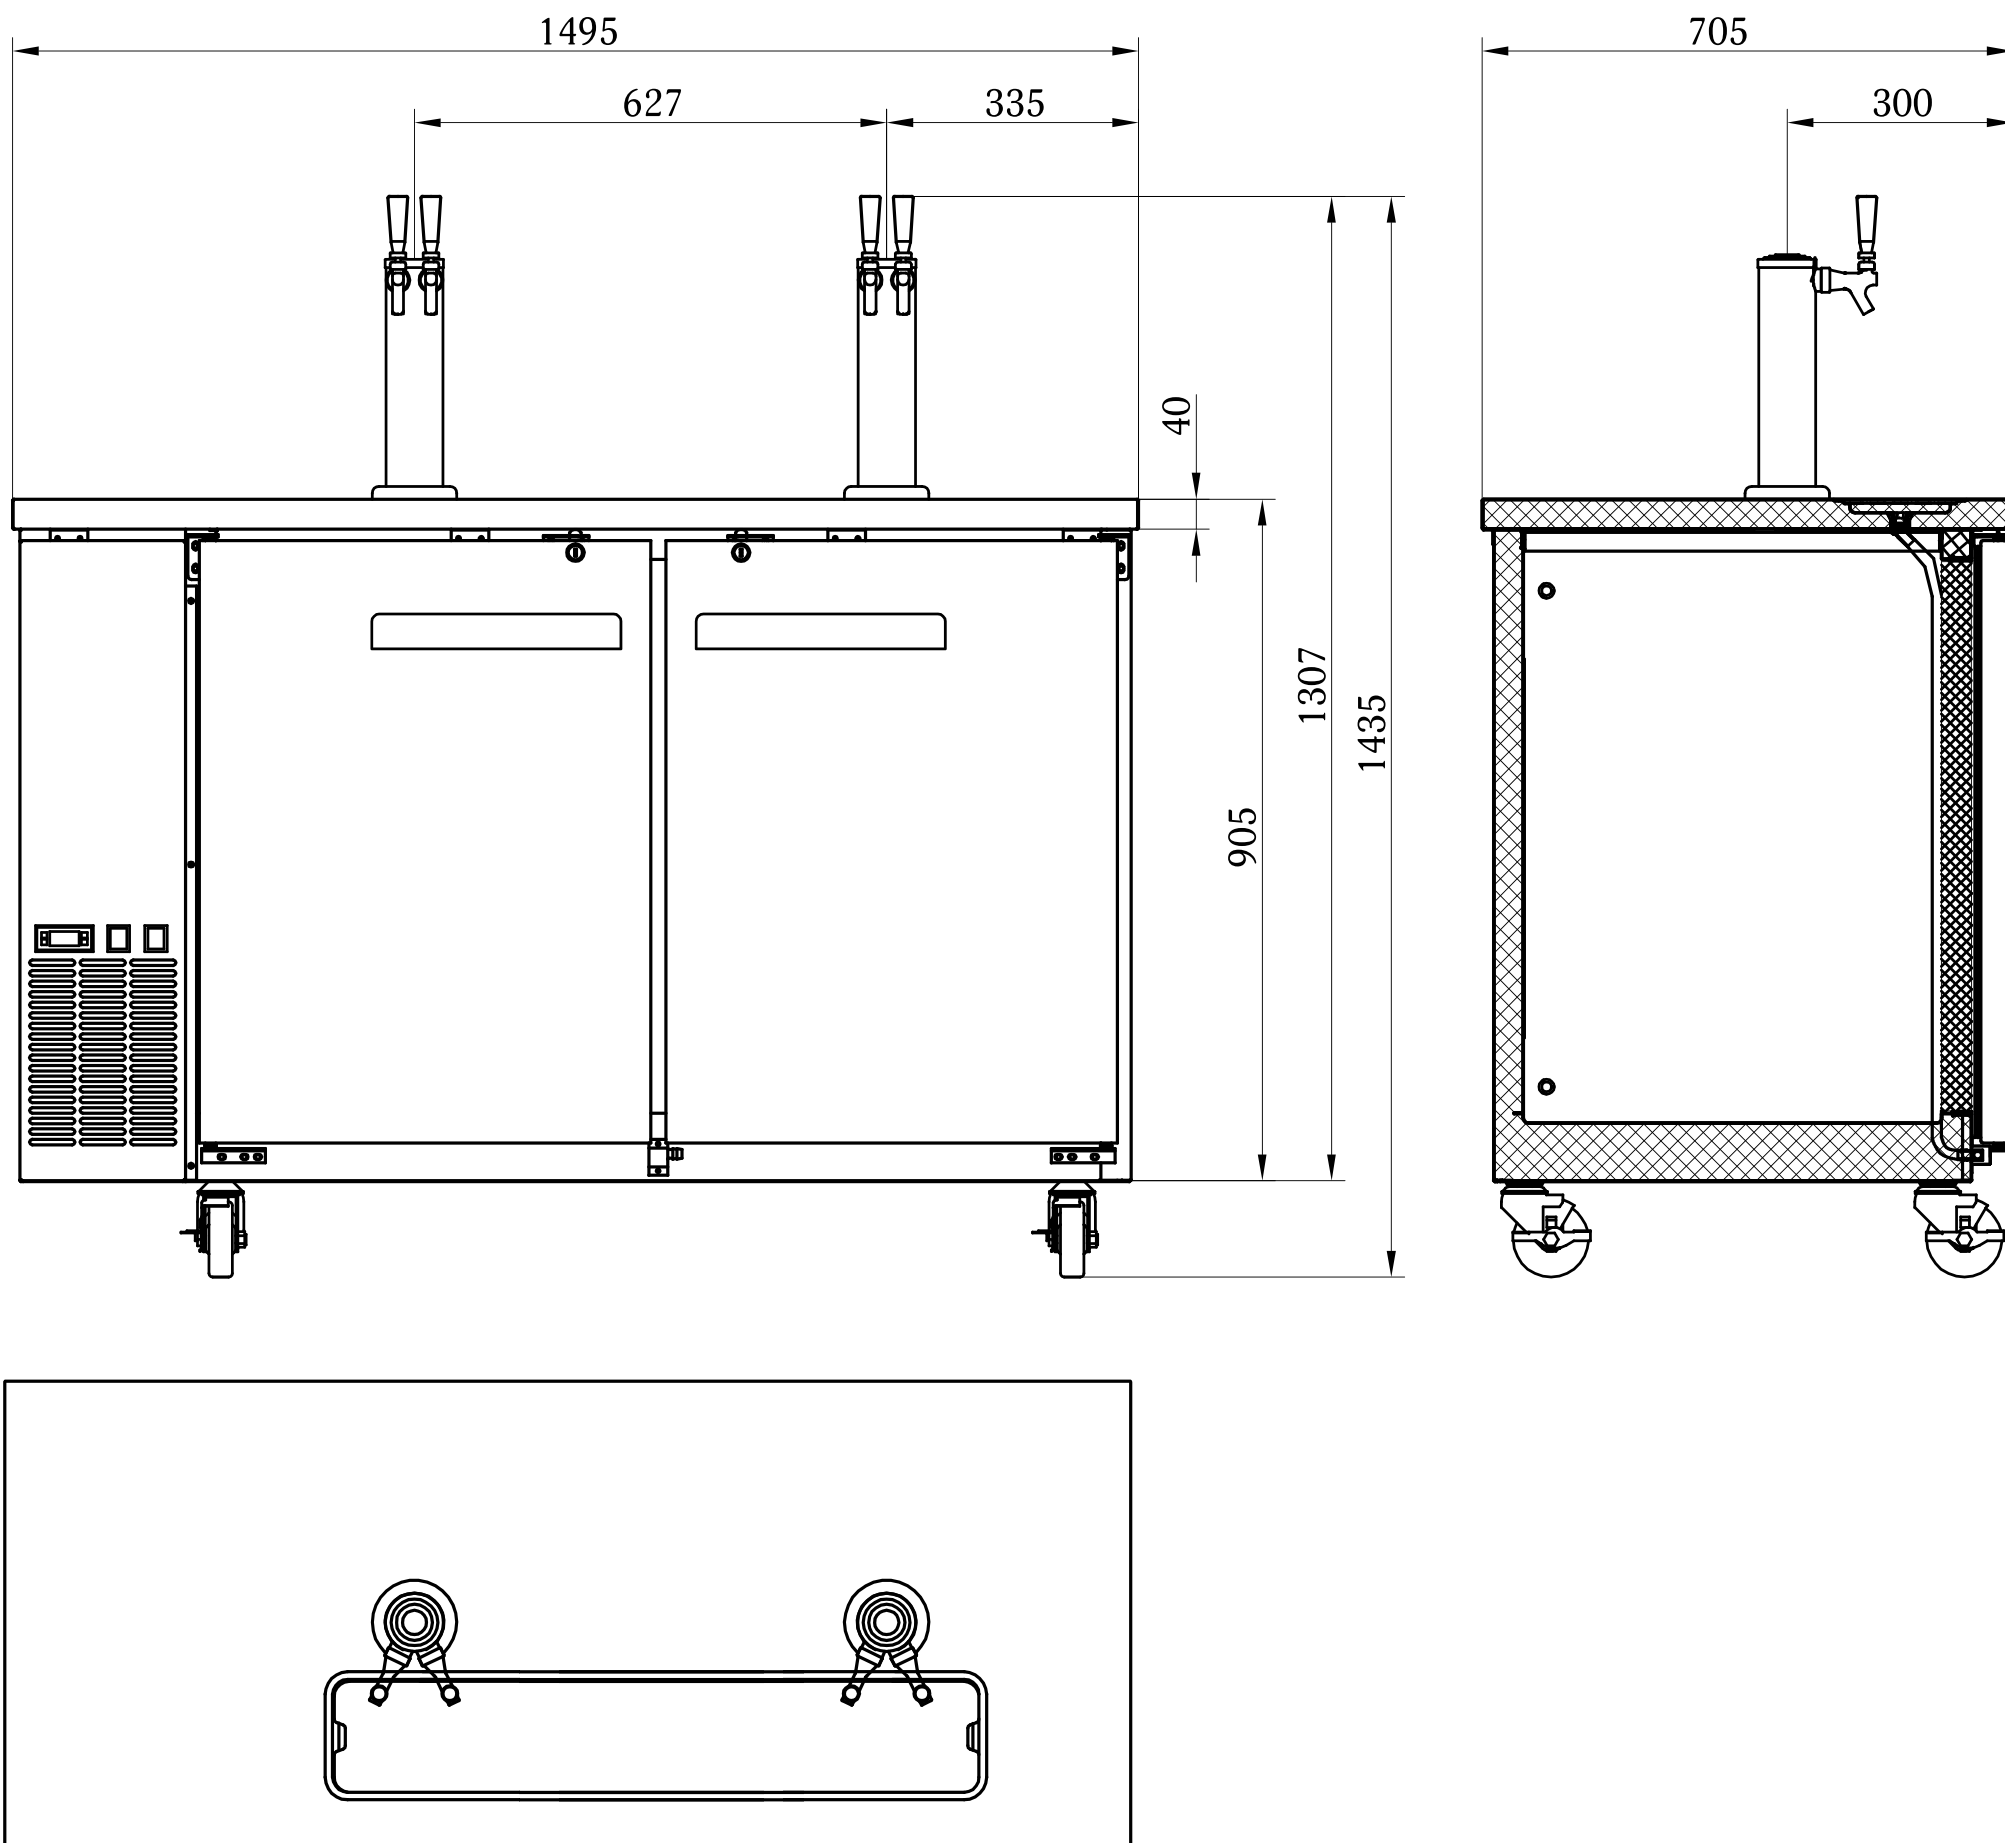

\*Specifications are subject to change without prior notice.