


- Durable stainless steel top, interior walls, floor and ceiling.
- Exterior construction is attractive corrosion resistant vinyl on steel in black finish.
- Refrigeration system keeps the drinks at safe temperatures between 33°F and 41°F (0.5°C to 5°C).
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Pre-installed leveling feet. Heavy-duty casters with brakes included with each fridge.
- Self-Closing doors with locks.
- Removable installation board makes it easy to access condenser coil for cleaning and service.
- Refrigerant: HYDRO-CARBON R290.



Beer Towers Included:

- 2 x 3" diameter 2-tap column towers, with 304SS shanks and faucets

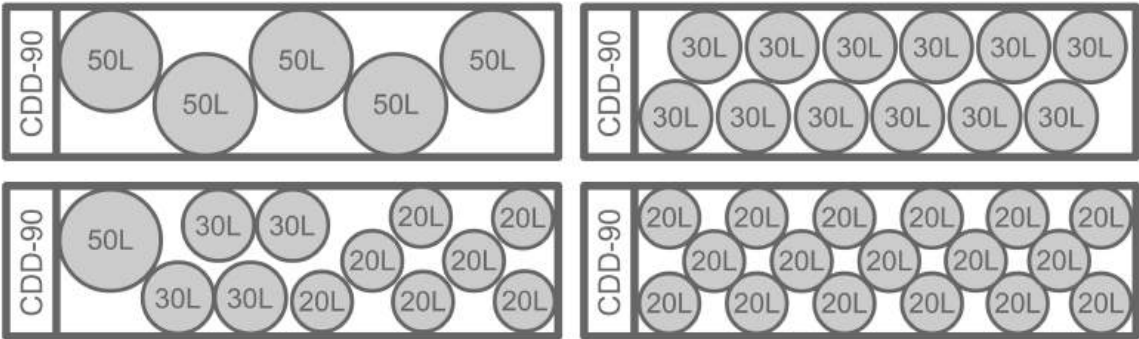


MODEL	DOORS	SHELVES	CAPACITY (cu.ft./barrels)	AMPS	HP	VOLTS	DIMENSIONS - WxDxH inches/mm			PLUG TYPE
							Width	Depth	Height*	
CDD-90	3	6	32 4*1/2	4.7	1/4+	115/60/1	90 3/8 2295	27 3/4 705	35 5/8 905	NEMA 5-15P

*Specifications are subject to change without prior notice.

DIRECT DRAW BEER COOLERS

SOLID DOORS
CDD-90

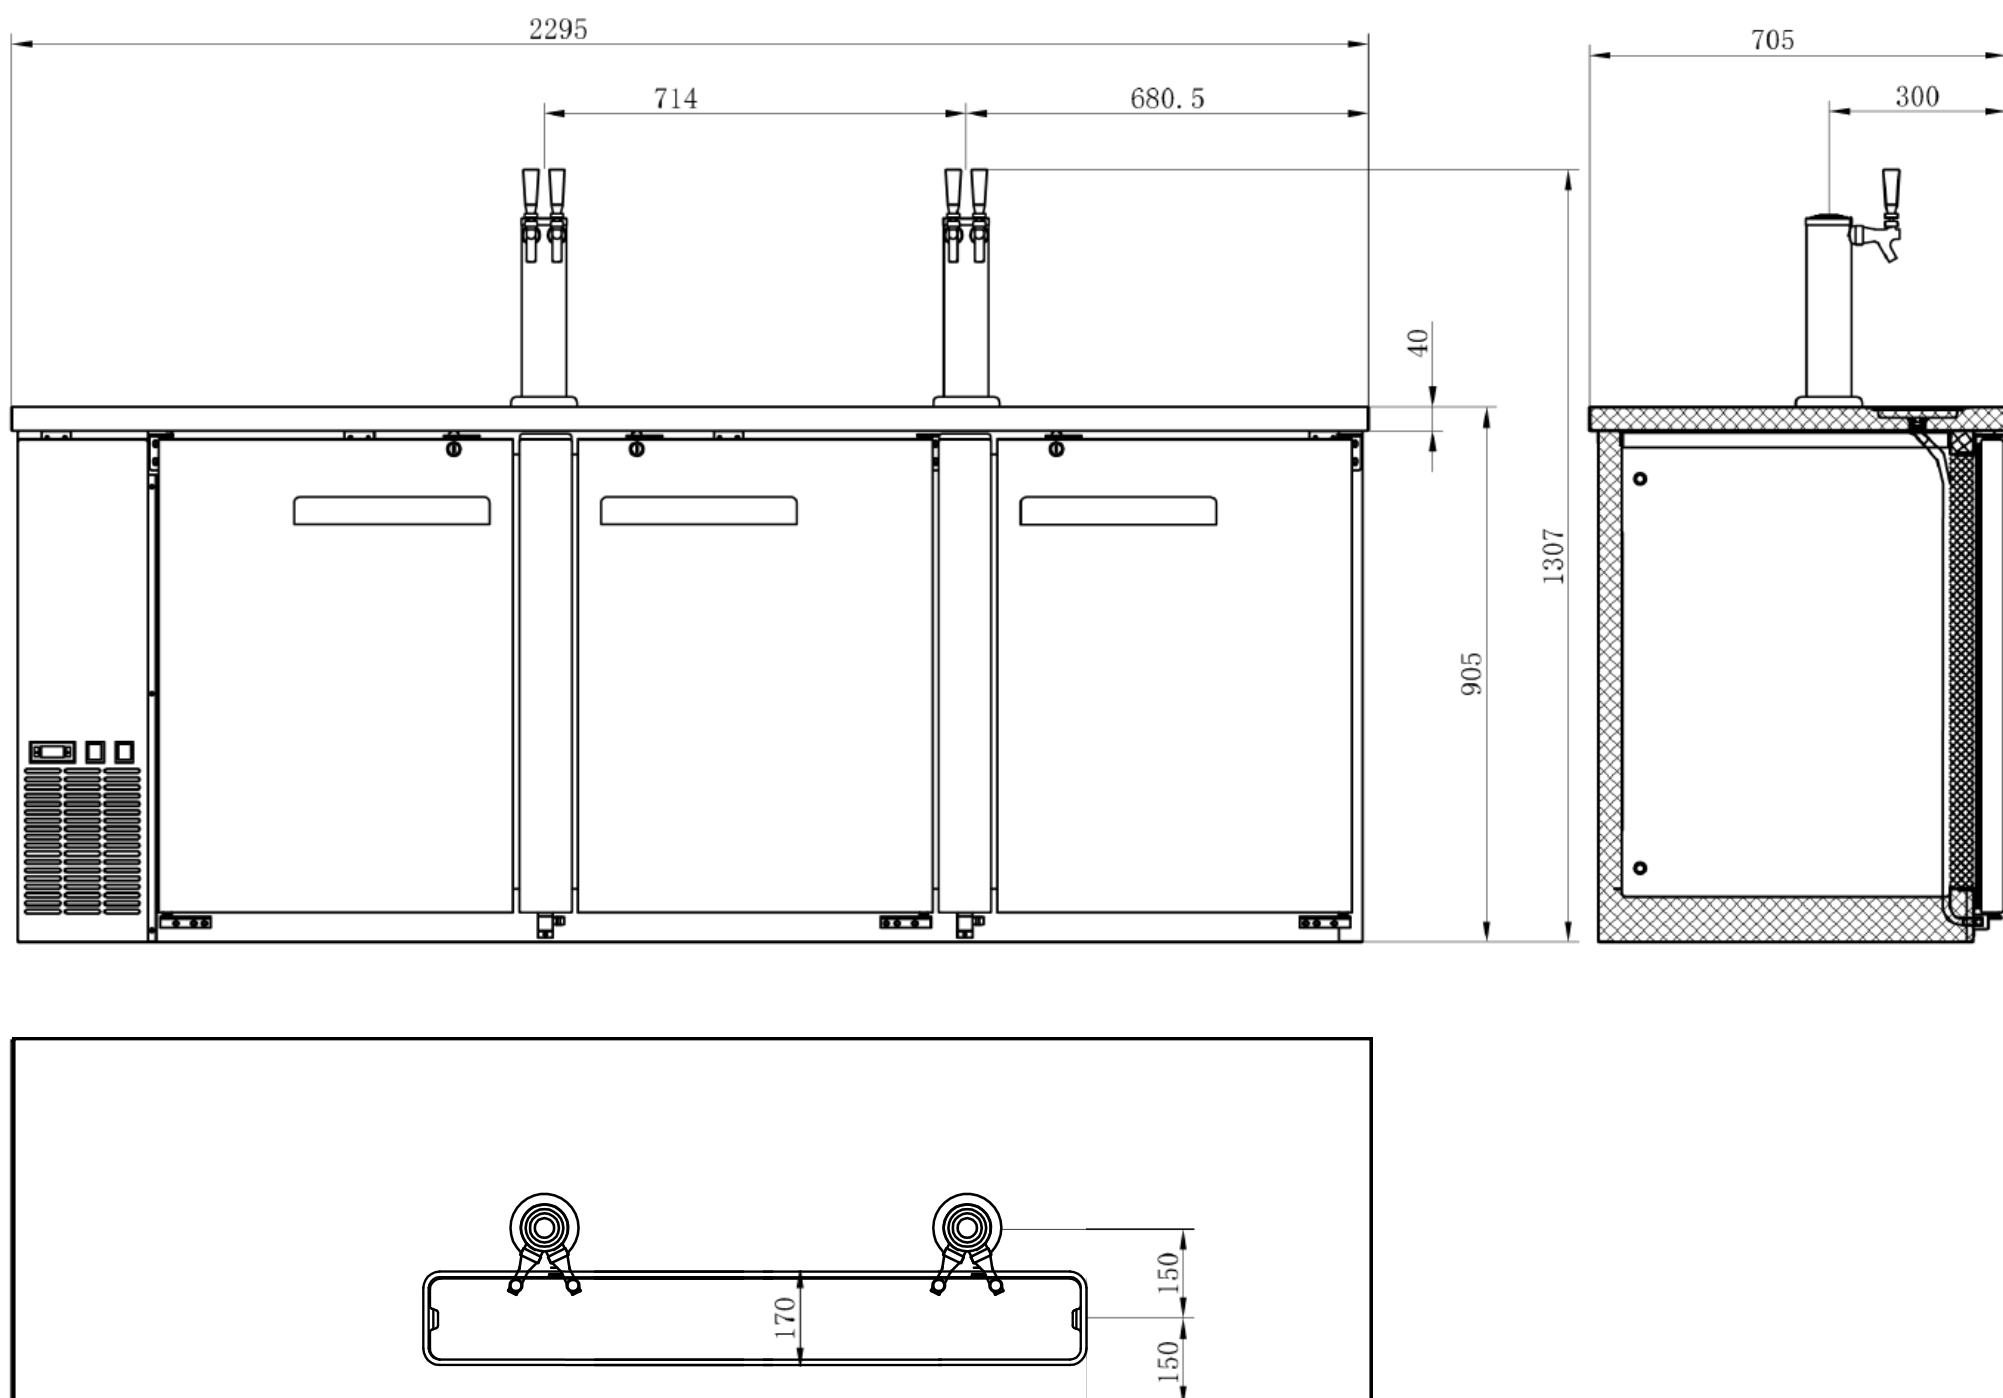

*Specifications are subject to change without prior notice.