





DIMENSIONS:

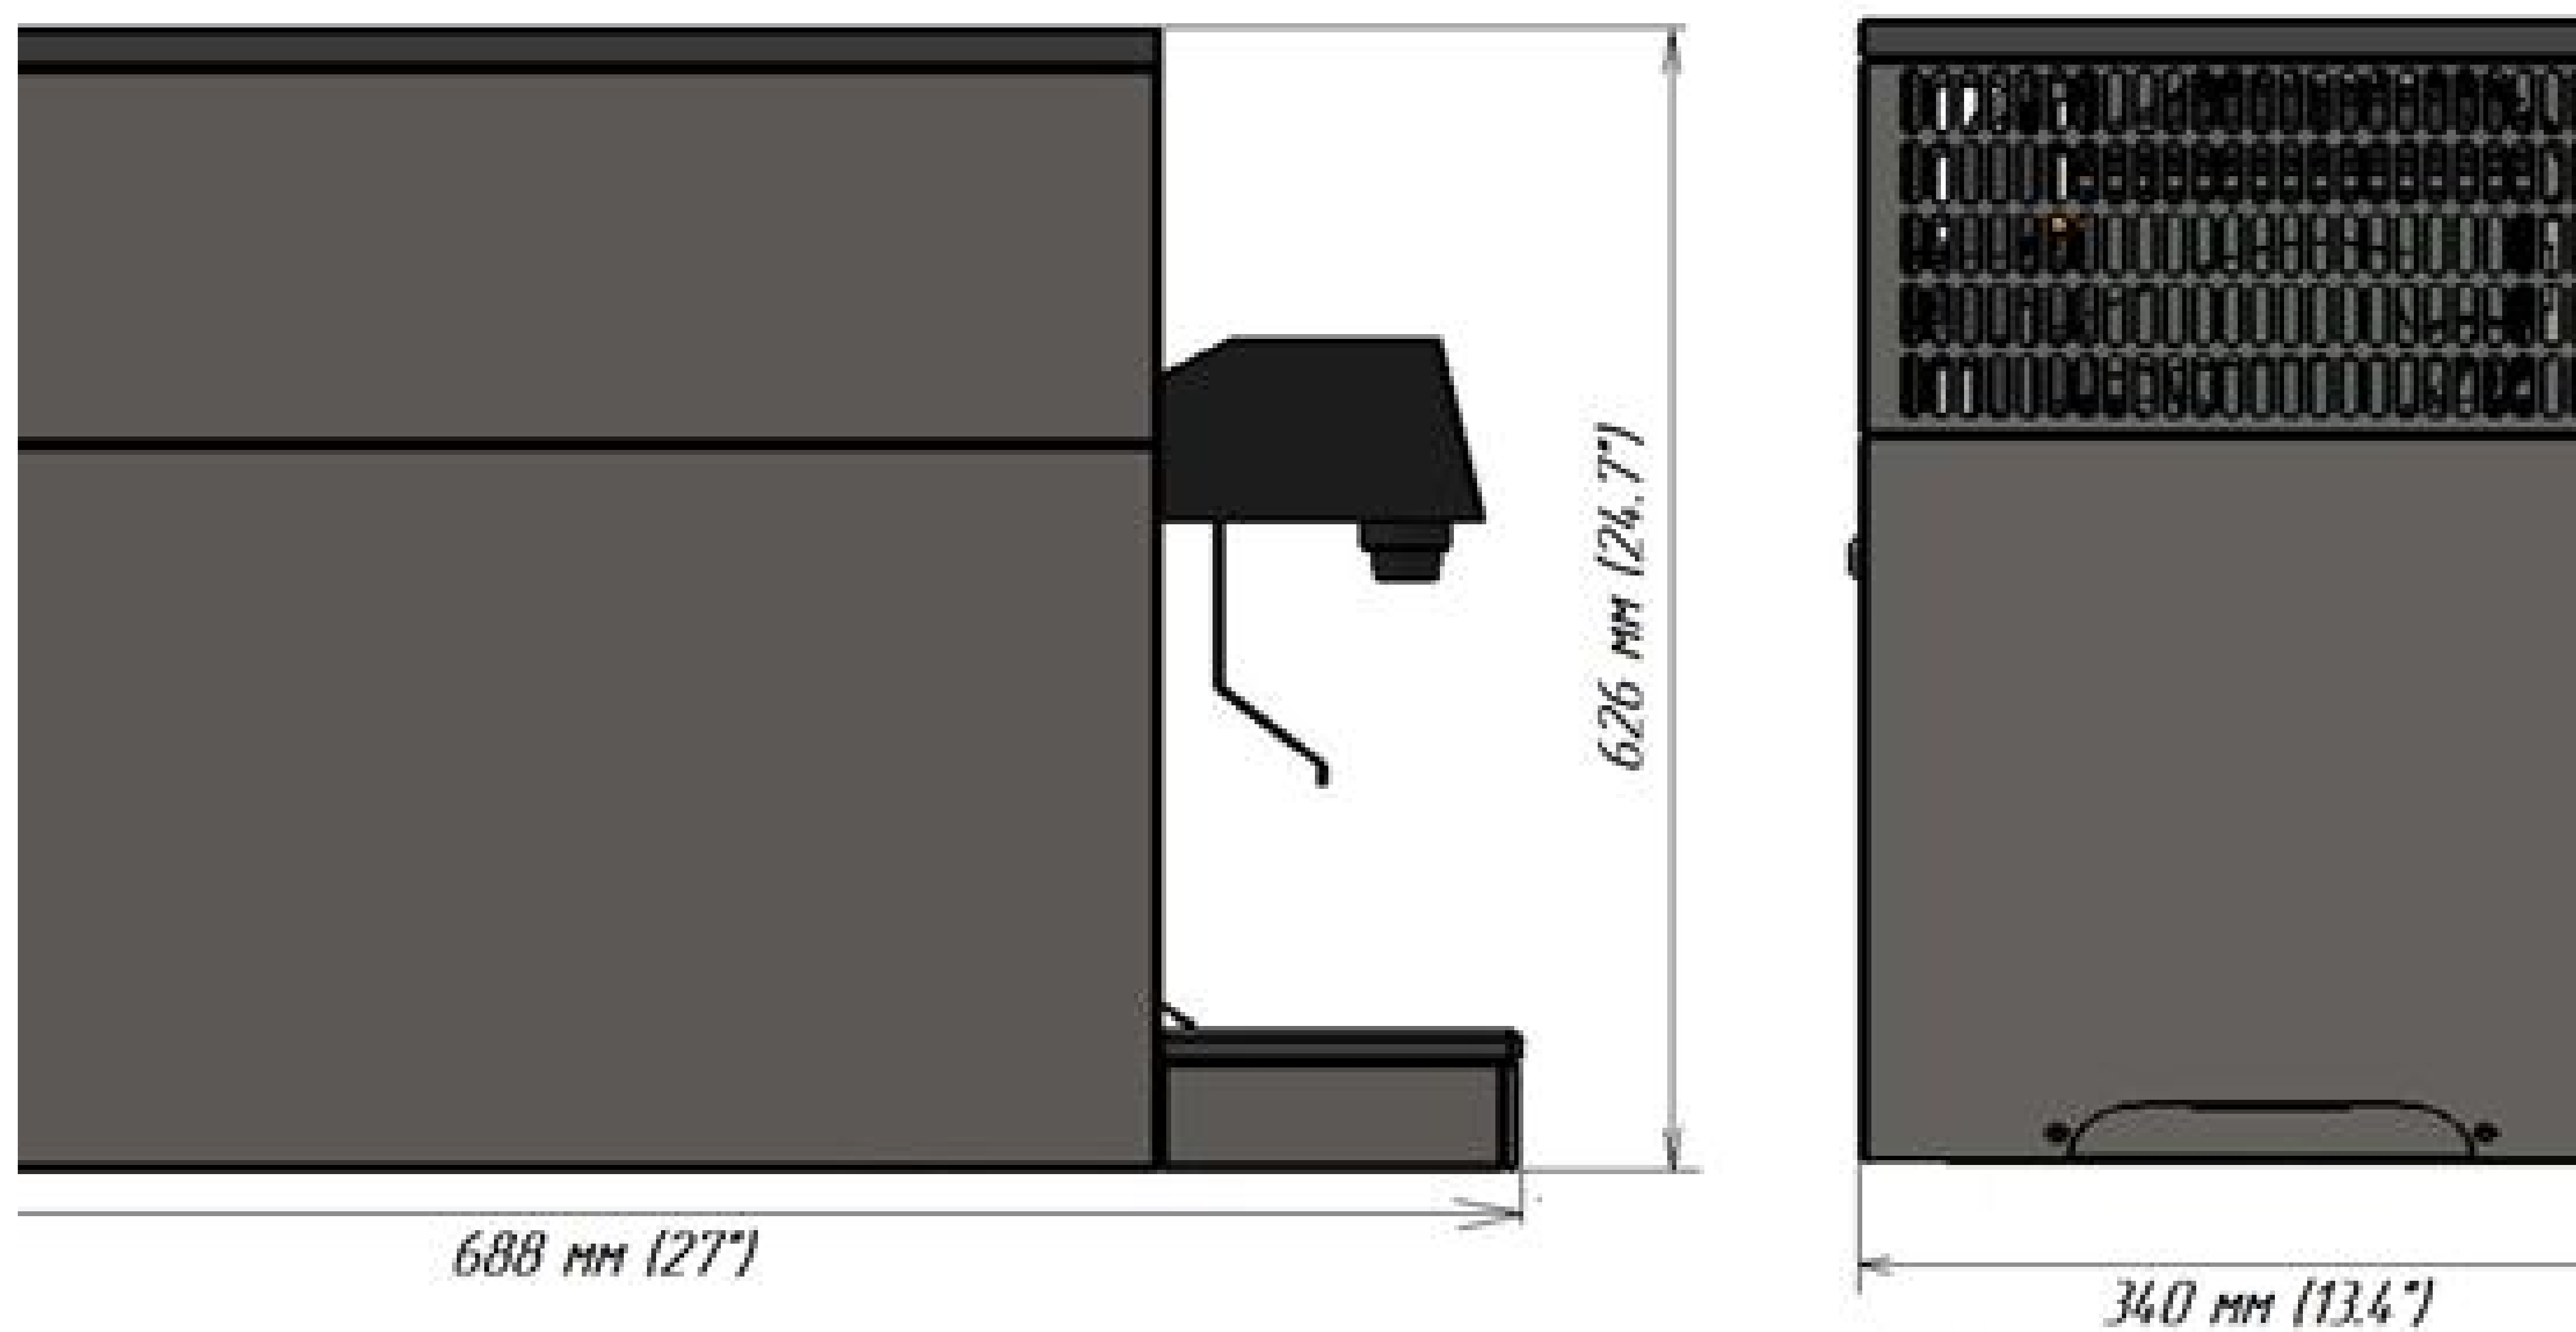


Specifications

TECHNICAL SPECIFICATION OF DISPENSER	CarboMix 4 Plus
NUMBER OF PRODUCT COILS, PCS	4
ICE TANK VOLUME	24.5 l (6.5 gal)
OPERATING AMBIENT TEMPERATURE	23.9-40.0 °C (75-105 °F)
PRODUCT OUTLET TEMPERATURE 1	<4.4 °C (<40 °F)
DRAW CAPACITY 355 ML (12 OZ.), 2 CAP/MIN, FROM 24°C (75°F) TO 4,4°C (40°F)	
ICE BANK WEIGHT	7,5 kg (16,5 lb)
CARBONATOR VOLUME (TOTAL/MAX/MIN)	1.65 l/1.05 l/0.88 l 0.44 gal/0.28 gal/0.23 gal
CARBONATOR PUMP	2.2 lpm (0.8 gpm)
ELECTRIC NETWORK	115 V, 60 Hz (24V at valves)
CURRENT	5.0 A
POWER	350 W
DIMENSIONS, MM	
WIDTH	340 mm (13.4")
DEPTH	688 mm (27")
HEIGHT	626 mm (24.7")
WEIGHT	60 kg 132 lb

Wiring diagram

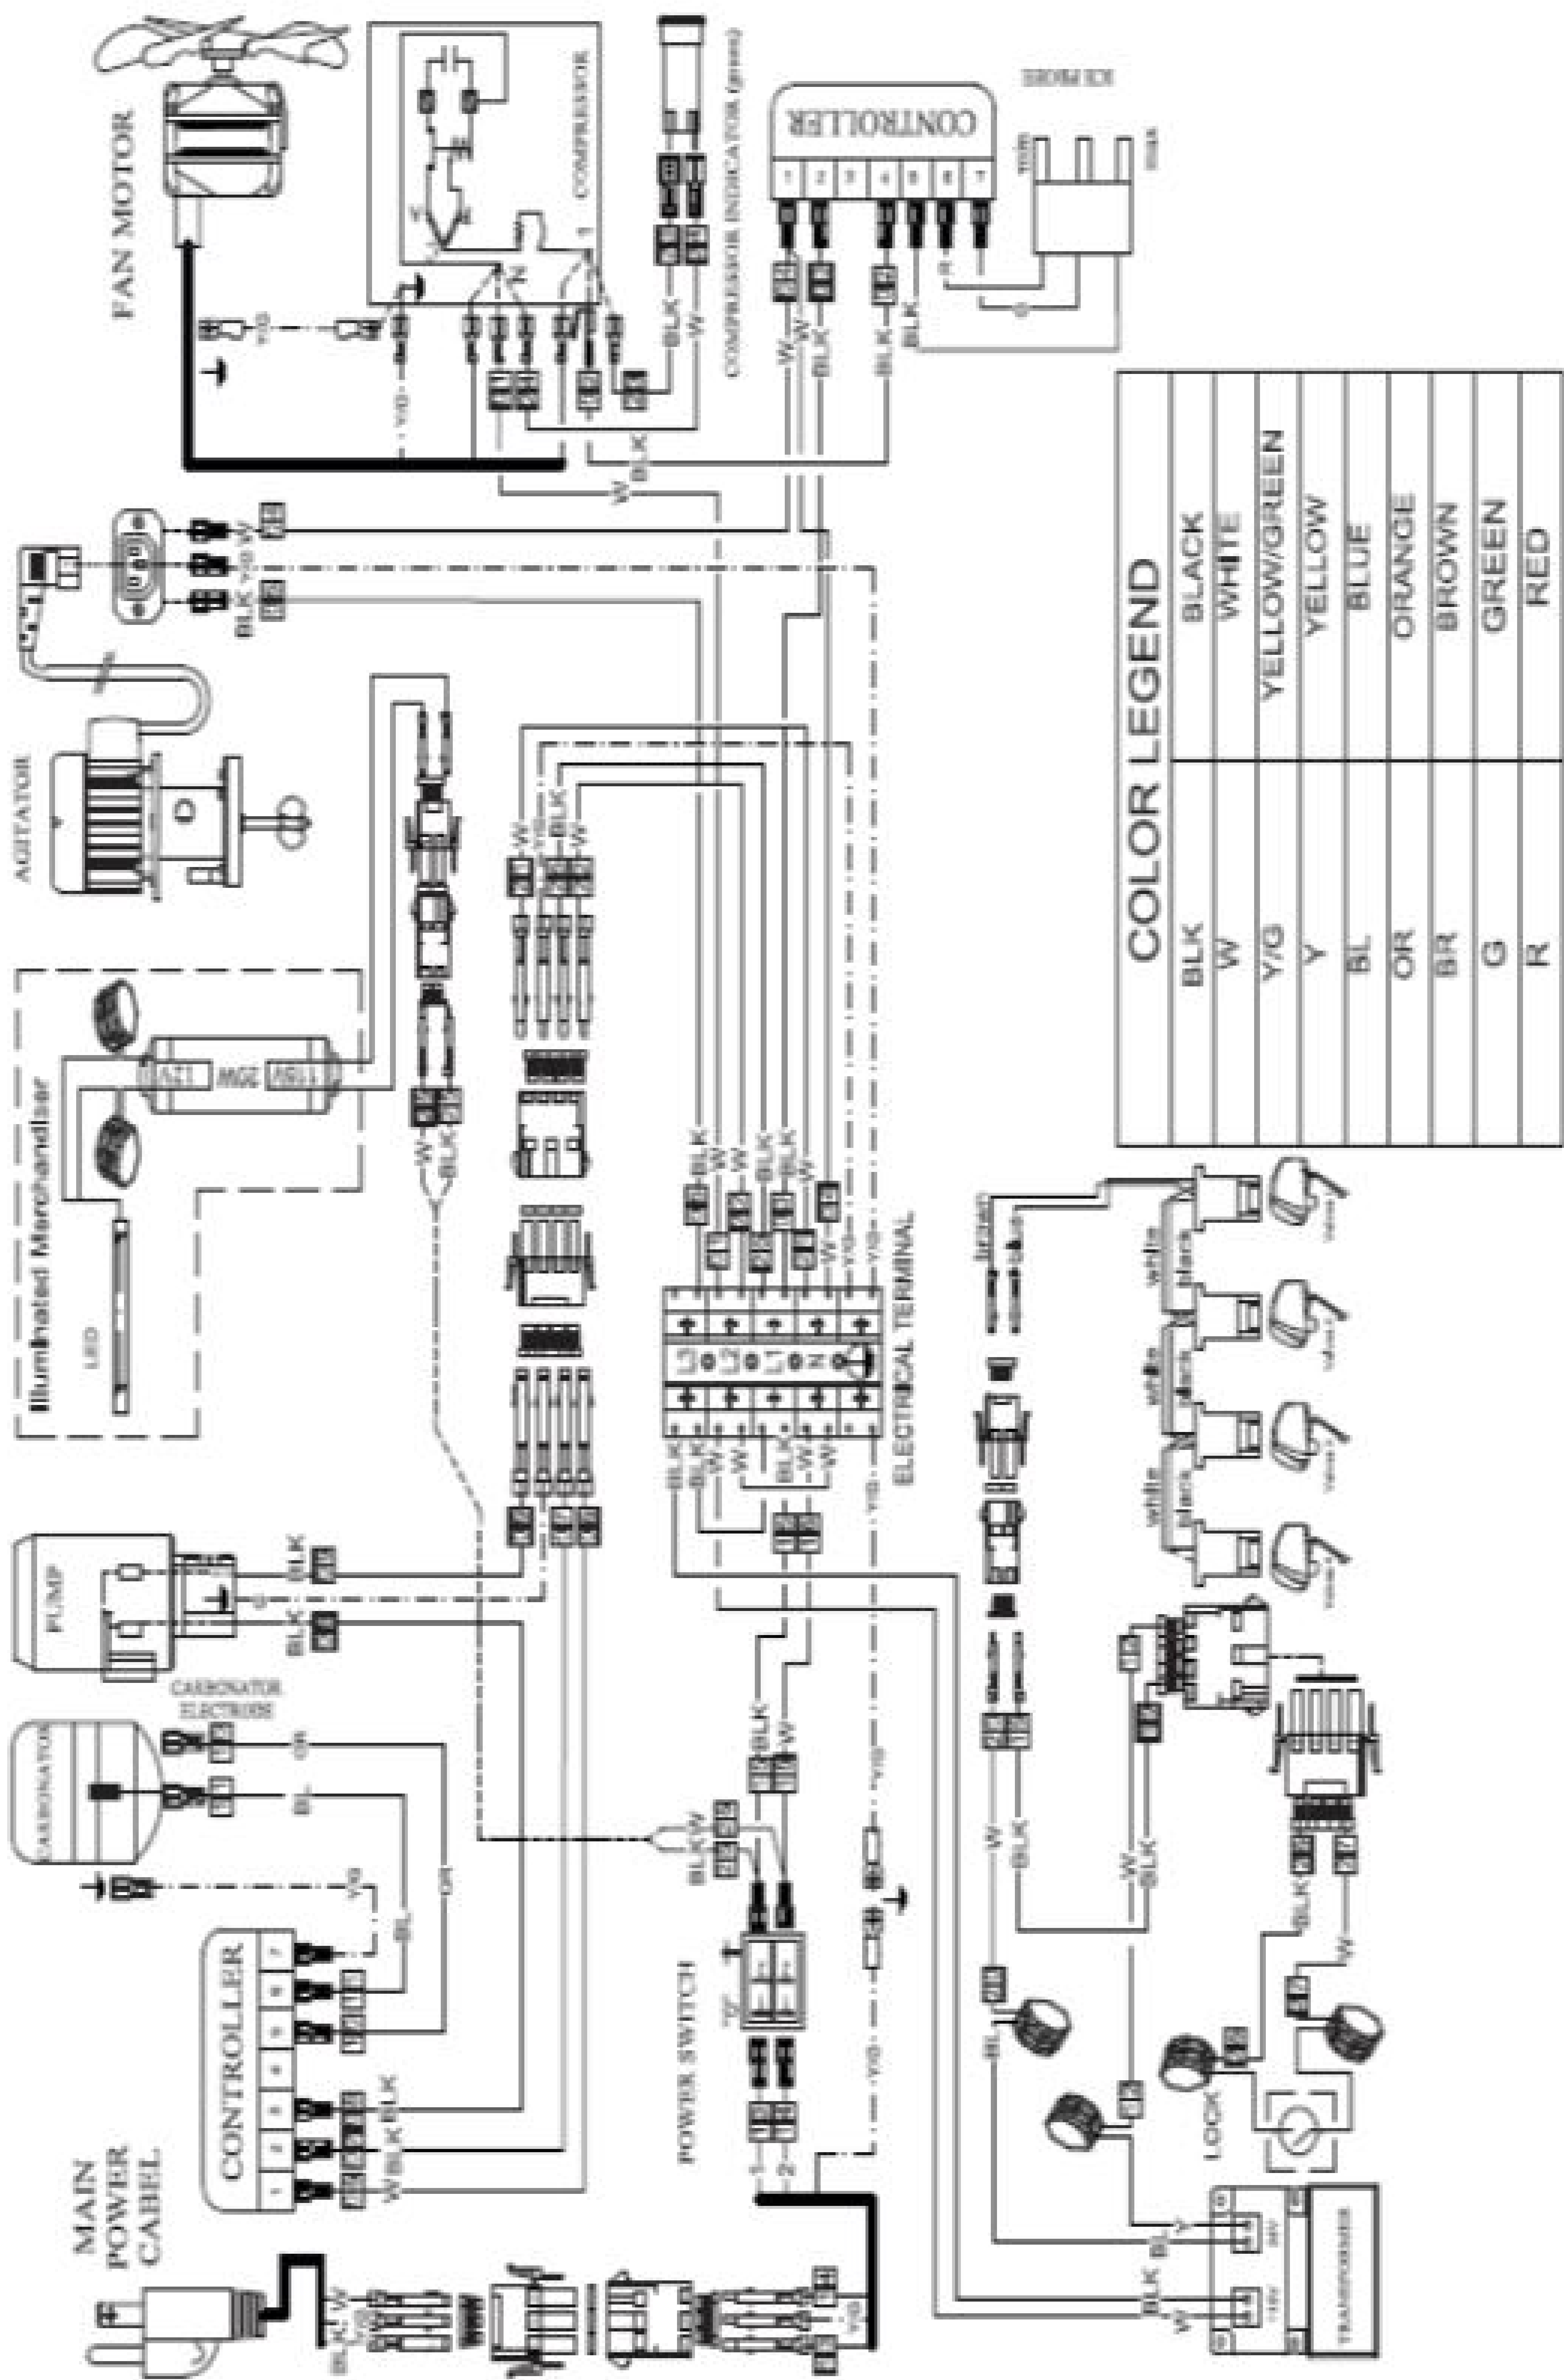

PARTS

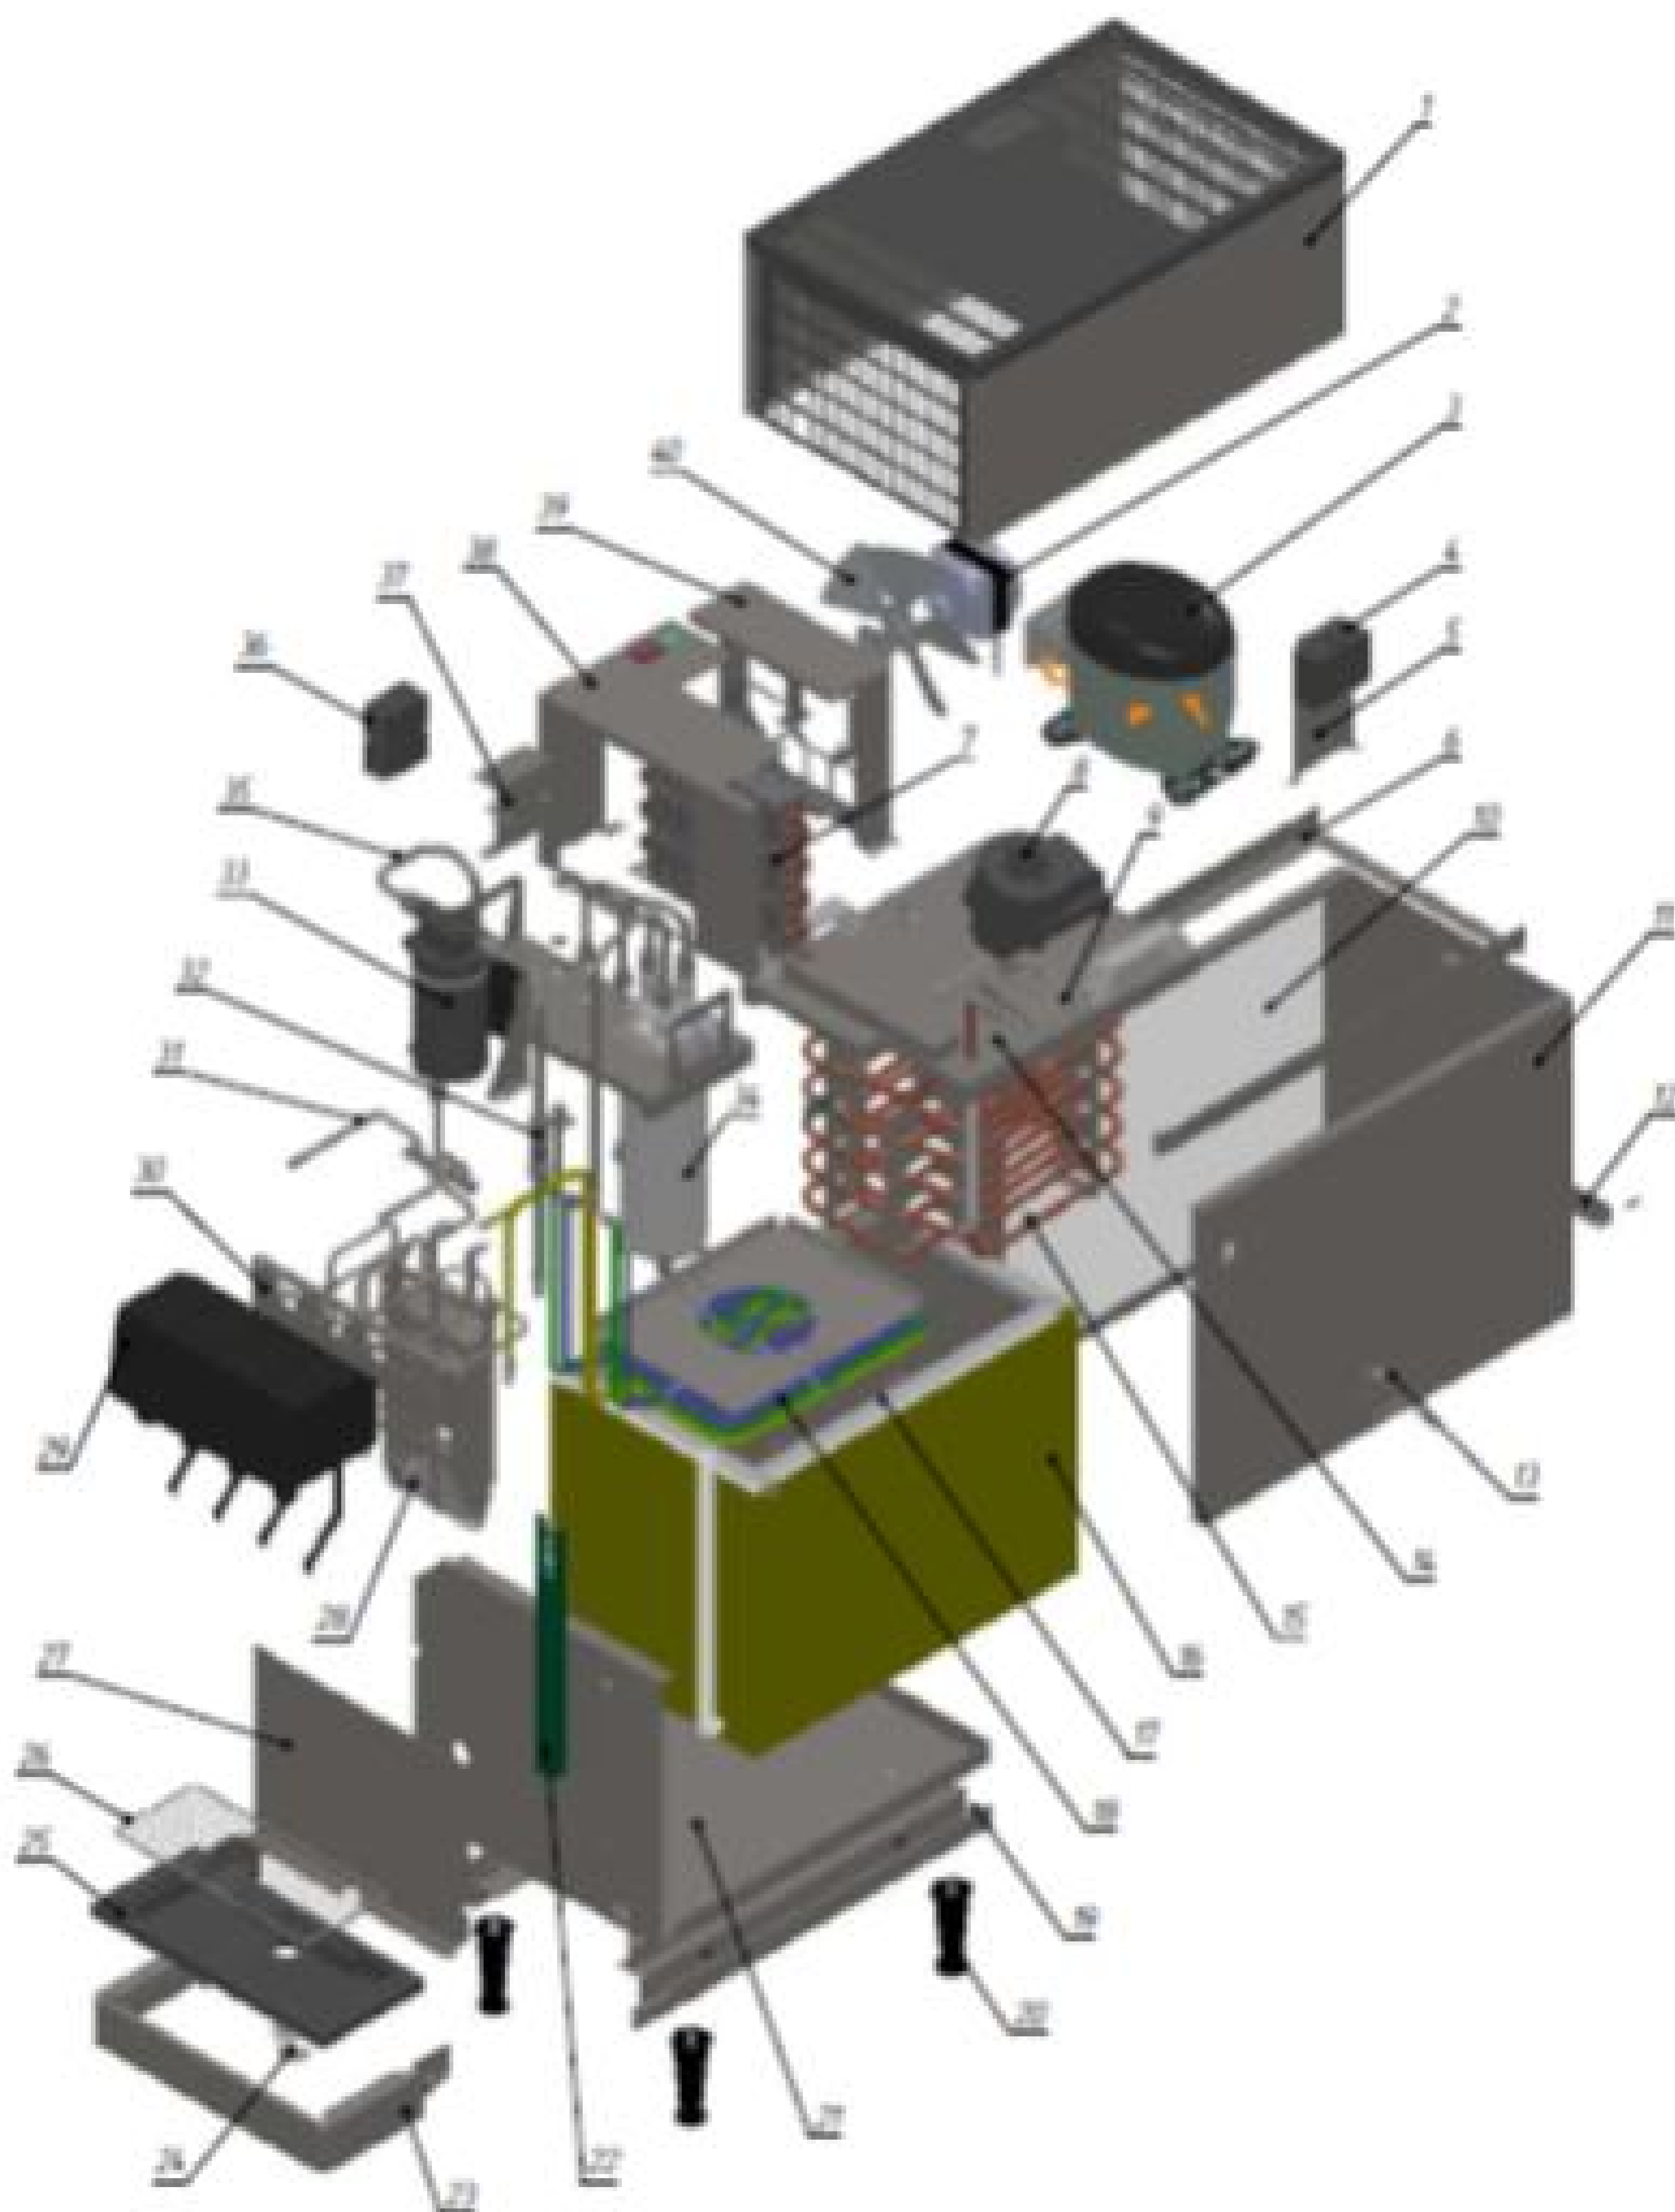

1	Bonnet Assy
2	Fan motor
3	Compressor Embraco
4	Controller (Compressor)
5	Controller bracket
6	Frame
7	Condenser (copper-aluminum)
8	Agitator Flojet TMA5
9	Agitator base
10	Thermal insulation
11	Cabinet Assy
12	Back panel
13	Switch-lock
14	Base
15	Evaporator Assy
16	Tank Insulation
17	Tank Assy
18	Tube Assy, Water
19	Leg Bracket Assy
20	Legs (option)
21	Plate, Bottom
22	Drain tube holder
23	Drip Tray
24	Drain
25	Plastic bottom of the drip pan
26	Cup Rest
27	Splash Plate
28	Tube Assy, Syrup
29	Lancer Post-Mix Valves (4 pieces)
30	Faucet Plate, 6 Valve
31	Manifold
32	Check valve
33	Carbonator Motor
34	Carbonator Assy
35	Tube Assy
36	Controller (Carbonator Motor)
37	Controller bracket
38	Panel with connectors
39	Diffuser
40	Fan impeller